


- NOTES:
1. CONCRETE, CONCRETE REINFORCEMENT, ELECTRICAL, PIPING, PIT VENTILATION, DRAINAGE, EDGING, AND RAILINGS ARE THE CUSTOMERS RESPONSIBILITY. CHECK FEDERAL, STATE, AND LOCAL RULES, REGULATIONS, AND CODES.
 2. ALL FLOORS, FOOTINGS & WALLS ARE TO BE POURED CONCRETE.
 3. SUBPIT IS OPTIONAL.
 4. ALL CONCRETE SHALL BE 3000 PSI MINIMUM.

P 4 4 1


SHT 1 OF 2		HUNTER Engineering Company	
THIRD ANGLE PROJECTION		1650 HUNTER DRIVE BRIDGETON MISSOURI 63044	
NAME: P441 PIT DETAIL		MATERIAL: FINISH:	
HEAT TREATMENT: SCALE: .075		DR: RJS Date: 11-18-09 CK: Date:	
SUPERSEDES:		PART NO. 6120-T	
ROUTING: R I CC A PD BP MS W P PS		SIMILAR TO: INTERPRET DIMENSIONS AND TOLERANCES PER ANSI Y14.5M 1982	

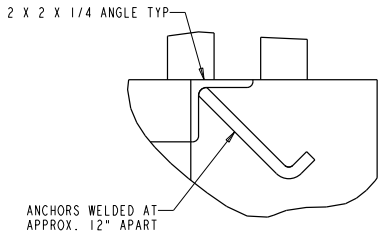


DETAIL A
SCALE 0.500

DIMENSION	30" DEEP PIT	36" DEEP PIT
A	30"	36"
B	33"	30"
	OPTIONAL (SEE NOTE)	STANDARD


NOTE: 36" DEEP PIT IS STANDARD AND 30" DEEP PIT IS OPTIONAL. WHEN ORDERING FOR AN OPTIONAL 30" DEEP PIT, MAKE THE FOLLOWING SUBSTITUTION:
SUBSTITUTE QTY : 2 233-78-1-ann FOR 233-77-1-ann.
NOTE: WHEN ORDERING FOR AN EXISTING 24" PIT, MAKE THE FOLLOWING SUBSTITUTION:
SUBSTITUTE QTY : 2 233-79-1-ann FOR 233-77-1-ann.

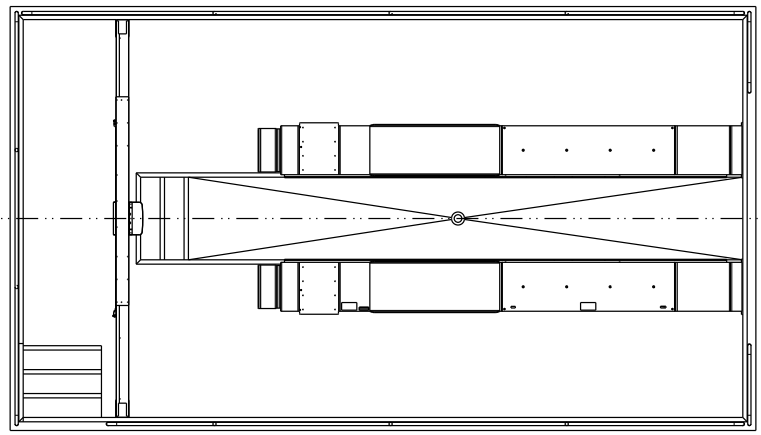


SCALE 0.035

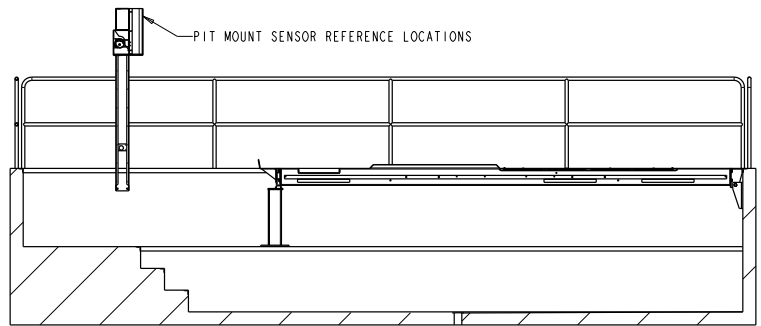

SECTION C-C

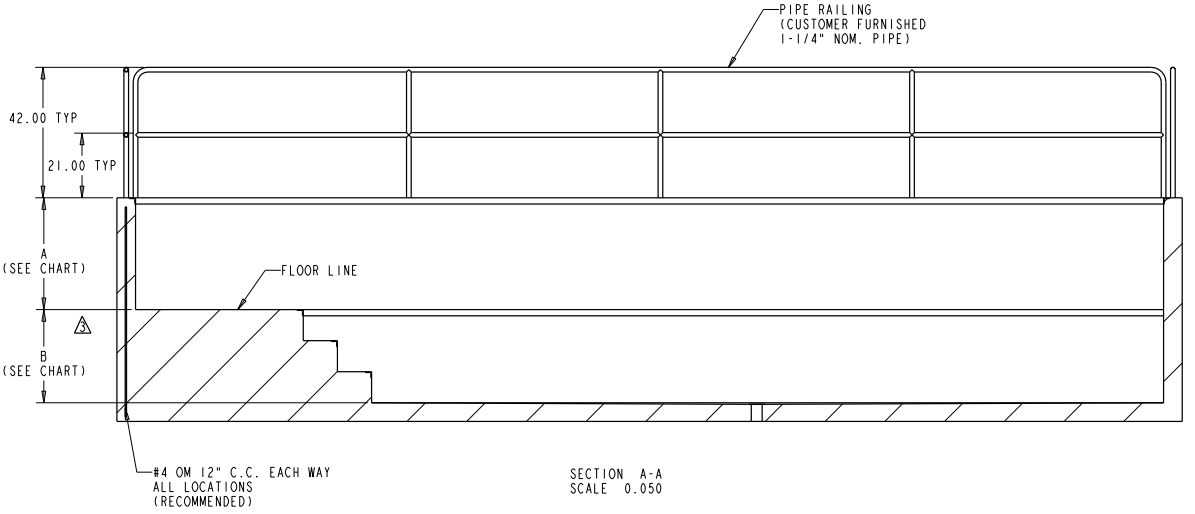

SECTION A-A
SCALE 0.050

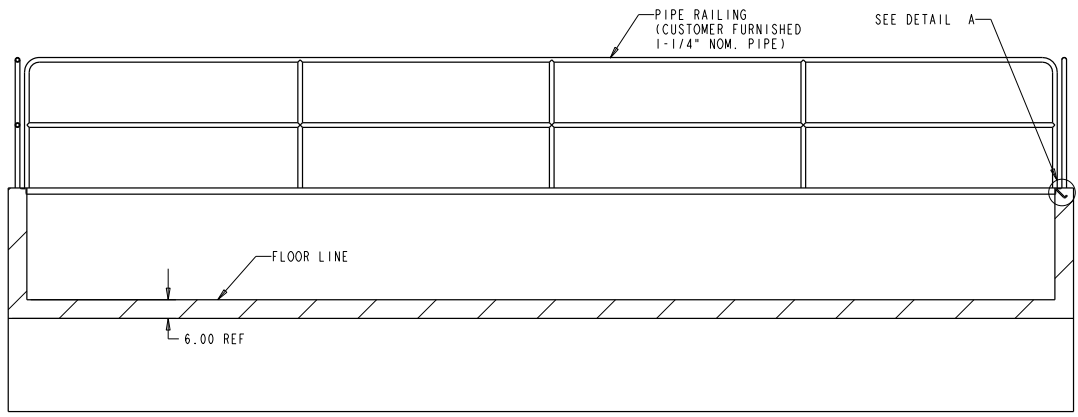

SECTION B-B
SCALE 0.050

- NOTES:
1. CONCRETE, CONCRETE REINFORCEMENT, ELECTRICAL, PIPING, PIT VENTILATION, DRAINAGE, EDGING, AND RAILINGS ARE THE CUSTOMERS RESPONSIBILITY. CHECK FEDERAL, STATE, AND LOCAL RULES, REGULATIONS, AND CODES.
 2. ALL FLOORS, FOOTINGS & WALLS ARE TO BE POURED CONCRETE.
 3. SUBPIT IS OPTIONAL.
 4. ALL CONCRETE SHALL BE 3000 PSI MINIMUM.

P 4 4 1

SHT 2 OF 2		HUNTER Engineering Company	
THIRD ANGLE PROJECTION		1620 HUNTER DRIVE BRIDGETON MISSOURI 63044	
NAME: P441 PIT DETAIL		SCALE: AS NOTED	
MATERIAL:		DATE: 11/18/09	
HEAT TREATMENT:		SUPERSEDES:	
DR: BJS		DATE: 11/18/09	
PART NO. 6120-T		SUPERSEDED BY:	
ROUTING: R I OC A PD BP MS P PS		INTERPRET DIMENSIONS AND TOLERANCES PER ANSI Y14.5M 1982	